

The BA327E-SS intrinsically safe, panel mounting loop powered Indicator has a rugged stainless steel enclosure allowing it to be safely installed in an Ex e or Ex p panel, in marine environments or where the front of the instrument is likely to be impacted. The indicator has a full 5 digit display plus a 31 segment bargraph with guaranteed performance between -40 and 70°C. The scale card can easily be marked to show the units of measurement and can be installed on-site without dismantling the instrument or removing it from the panel.

Main application of the BA327E-SS is to display a measured variable in engineering units when mounted in an Ex e or Ex p enclosure located in Zones 1 or 2. The front of the indicator has IP66 ingress and impact protection which allows it to be installed in a certified Ex e or Ex p panel enclosure without invalidating the enclosure certification. The indicator's rugged stainless steel housing and 10mm thick toughened glass window also make the BA327E-SS ideal for intrinsically safe applications in marine environments or where the front of the instrument is likely to be impacted.

The bold 12.7mm high 5 digit display and 31 segment bargraph provides maximum contrast and have a wide viewing angle, allowing the BA327E-SS to be easily read in most lighting conditions over a wide temperature range. An optional factory fitted backlight is available for applications in poorly illuminated areas. The five digits, with four decimal point positions and a negative sign, may be configured to display any variable between -99999 and 99999.

International intrinsic safety certification allow the BA327E-SS to be installed worldwide. The 4/20mA input terminals comply with the requirements for *simple apparatus* which, together with the low voltage drop, permit connection to most intrinsically safe circuits.

For applications in combustible dusts the BA327E-SS may be installed in a certified Ex t panel enclosure without invalidating the enclosure's certification.

A backlight which may be loop or separately powered is available as a factory fitted option. It provides green background illumination allowing the display to be read at night or in poorly illuminated areas. When powered from the 4/20mA loop no additional intrinsically safe interface or wiring are required and the indicator input remains compliant with the requirements for *simple apparatus*. Powering from a separate supply produces a brighter backlight but requires an additional intrinsically safe interface. Two backlights may be separately powered from one intrinsically safe interface.

Optional dual alarm outputs which can switch hazardous or safe area loads, such as sounders, beacons or solenoid valves are available as a factory fitted option. The two galvanically isolated solid state alarm outputs may be independently configured as high or low alarms with normally open or closed outputs. Annunciators on the display show the status of both outputs.

Units of measurement may be shown on the scale card which is visible through the window on the right hand side of the display. Instruments are supplied with the units legend requested when ordered, but the scale card may be easily changed on-site without removing the BA327E-SS from the panel or opening the instrument enclosure.

Application Guide AG300 explains how the BA327E-SS and similar instruments may be safely installed in gas and dust hazardous areas. Copies may be downloaded from the BEKA website or requested from the BEKA sales office.

Other models in this range include the BA307E-SS which has a similar specification with four 15mm high digits.

BA327E-SS

Rugged 2-wire 4/20mA 5 digit indicator

Intrinsically safe for use in Zone 1 Ex e or Ex p panel enclosures and in harsh marine environments

- ◆ Rugged IP66 stainless steel enclosure.
- ◆ Intrinsically safe
- ◆ Front of indicator maintains Ex e, Ex p and Ex t enclosure certification.
- ◆ Loop powered only 1.2V drop.
- ◆ 5 digit 12.7mm high display & 31 segment bargraph.
- ◆ Optional backlight & alarms.
- ◆ Easy on-site scale card installation.
- ◆ Root extractor and 16 segment lineariser.
- ◆ 3 year guarantee

www.beka.co.uk/ba327e-ss



BEKA


associates

BEKA associates Ltd. Old Charlton Rd.
Hitchin, Hertfordshire, SG5 2DA, U.K.
Tel. (01462) 438301 e-mail sales@beka.co.uk
website: www.beka.co.uk


SPECIFICATION

Input	
Current	4 to 20mA
Voltage	Less than 1.2V at 20°C Less than 1.3V at -40°C Less than 5V with optional loop powered backlight.
Over range	±200mA or ±30V will not damage the indicator
Display	
Type	Liquid crystal, non-multiplexed 5 digits 12.7mm high & 31 segment bargraph.
Span	Adjustable between 0 & ±99999 for a 4/20mA input.
Zero	Adjustable between 0 & ±99999 with 4mA input
Decimal point	1 of 4 positions or absent
Polarity	Automatic minus sign
Zero blanking	Blanked apart from 0 in front of the decimal point.
Direction	Display may increase or decrease with increasing 4/20mA input.
Reading rate	2 per second
Over range	99999 or -99999 with flashing decimal points
Push buttons	
	Shows display with 4mA input
	Shows display with 20mA input
	Displays input in mA or as a % of span, has a modified function when alarms are fitted. Used for Tare function
Accuracy at 20°C	
Linear	±0.02% of span ±1 digit
Root extracting	±16µA at input ±1 digit
Temperature effect on:	
Zero	Less than 25ppm of span/°C
Span	Less than 50ppm of span/°C
Series mode rejection	Less than 0.05% of span error for 1mA pk to pk 50 or 60Hz interference.
Hazardous area certification	
International IECEx	
Code	Ex ia IIC T5 Ga Ex ia IIIC T80°C Db IP20 Ta = -40 to 70°C
Cert. Number	IECEx ITS 14.0048X (Special conditions permit installation in Ex e, Ex p and Ex t enclosures and apply for use in Group IIIC conductive dusts)
Europe ATEX and UK UKEX	
Code	Group II Category 1G and 2D Ex ia IIC T5 Ga Ex ia IIIC T80°C Db IP20 Ta = -40 to 70°C
Input parameters	
Ui	30V dc
Ii	200mA
Pi	0.84W
Output parameters	
Cert. Numbers	Comply with requirements for <i>simple apparatus</i> ITS14ATEX28077X & ITS21UKCA0095X (Special conditions permit installation in Ex e, Ex p and Ex t enclosures and apply for use in Group IIIC conductive dusts)
USA FM	
Standard Code	3610 Entity CL I: Div 1: Gp A, B, C, & D CL I: Zone 0: AEx ia IIC T5 @ 70°C May be installed in an AEx e, AEx p or AEx n panel without invalidating panel's certification.
Standard Code	3611 Nonincendive CL I, II, III: Div 2: Gp A, B, C & D CL I: Zone 2: Gp IIC T5 @ 70°C 3041487
File	3041487
Canada cFM	
File	3041487C
Environmental	
Operating temperature	-40 to 70°C
Storage temperature	-40 to 85°C
Humidity	To 95% at 40°C non-condensing
Vibration	Report available
Enclosure	
Ingress protection	Front IP66, rear IP20
Material	Stainless steel BS 3146-2:1977 ANC4B (316)
EMC	Complies with 2004/108/EC
Mechanical	
Terminals	Screw clamp for 0.5 to 1.5mm ² cable with removable terminal blocks.
Weight	0.85kg
Accessories	
Backlight	Green may be loop or separately powered
Loop powered	Indicator input voltage increased to 5V max.
Separately powered	9V at 22mA from IS interface

DIMENSIONS (mm)

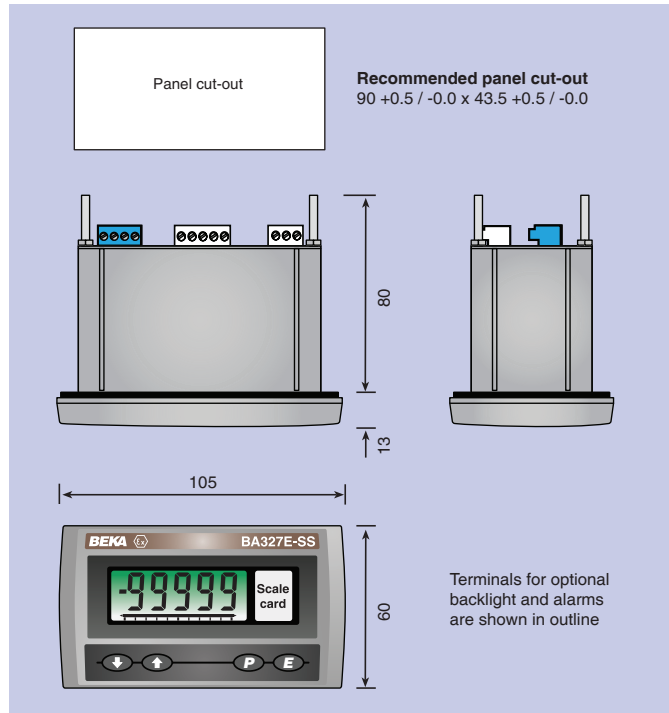

TERMINAL CONNECTIONS

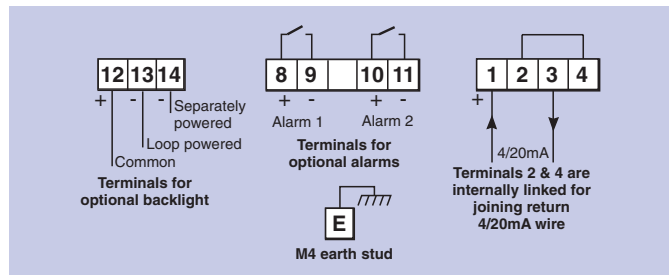

Alarms	Two alarm outputs each of which may be independently configured as a high or low alarm contact with a NO or NC output.
Output	Isolated solid state switch complying with the requirements for <i>simple apparatus</i> . Ron 5Ω + 0.7V max Roff 1MΩ min
Printed scale card	Blank card fitted to each indicator can be supplied printed with specified units of measurement.
Pack of printed scale cards.	Contains 28 common units of measurement and 2 blank cards.
Tag legend	Specified tag number or application information laser etched on rear of instrument.
Support plate	Evenly distributes clamping force when the indicator is installed in a non-metallic or thin panel less than 1mm thick.
BA495 rear cover and sealing kit	Provides impact and IP66 protection for rear of instrument. #

See accessory datasheet for details

HOW TO ORDER

Model number	BA327E-SS	Please specify Linear, root or lineariser*
Display mode	Linear, root or lineariser*	
Display at:	XXXXX XXXXX] Include position of decimal point & sign if negative. Together with intermediate points if linearisation is required.*
4.000mA 20.000mA		
Accessories	Backlight	
Display backlight	Alarms	
Dual alarms	Legend required	
Scale card	Legend required	
Tag	Support plate	
Support plate	BA495	
Rear cover and sealing kit		

* Will be set to display 0.00 at 4mA and 100.00 at 20mA with a linear display if calibration information is not supplied. Can easily be recalibrated on-site.