

The **BA614DF-F Fieldbus Indicator** is a new cost-effective field mounting instrument that displays a single fieldbus variable in a process area. Housed in a robust IP66 GRP enclosure, the instrument has a large, high contrast five digit display, plus a horizontal bargraph. The BA614DF-F indicator uses the same technology and compliments the well established BEKA eight variable fieldbus displays that are now in worldwide use.

Powered by the fieldbus the BA614DF-F only requires a 2-wire connection to the fieldbus segment, no additional power supply is required. Compatibility with most FOUNDATION™ fieldbus hosts is ensured by the use of a single *Input Selector* function block, which is supported by nearly all systems. Please contact the BEKA sales office for the latest compatibility information. The instrument has ITK 6.3 Fieldbus Foundation registration and device description files may be downloaded from their website or from www.beka.co.uk.

The **liquid crystal display** has large characters and is designed to provide maximum contrast and a wide viewing angle which enables the BA614DF-F indicator to be easily read in most lighting conditions. Five digits, with four decimal points and a negative sign, may be configured to display any value between -99999 and 99999. The 31 segment horizontal bargraph, which provides a bold analogue indication of the fieldbus variable, may be conditioned to any starting and finishing values within the fieldbus variable's range.

The **enclosure**, which is moulded in glass reinforced polyester (GRP), has stainless steel fittings, silicone gaskets and an armoured glass window. Its

robust construction provides IP66 protection, which has been independently assessed by Intertek Testing Services - report available. A separate terminal compartment allows the instrument to be installed and terminated without exposing the indicator electronics. To further simplify field wiring and subsequent inspection, the terminal cable entries and clamping screws are both forward facing. The indicator may also be mounted onto a vertical or horizontal pipe using one of the accessory kits.

The **FOUNDATION™ fieldbus Interface Guide** contains commissioning information for the BA614DF-F indicator. A copy may be requested from the BEKA sales office or from the BEKA web site at www.beka.co.uk

Units of measurement, tag or application information specified by the customer can be printed onto the instrument escutcheon that surrounds the display for no additional charge. For users who require a stainless steel identification label, the indicator can be supplied with a laser engraved stainless steel legend plate mounted on the front of the instrument.

For panel mounting applications see the BA618CF-F datasheet. This instrument is electrically identical to the BA614DF-F but is housed in a 144 x 72 panel mounting enclosure with an IP66 front.

For use in hazardous areas the intrinsically safe BA414DF-F and Type nL BA414NDF-F single variable fieldbus indicators are available. These have similar specifications as the BA614DF-F plus international certification allowing installation in most gas and dust hazardous areas.

BA614DF-F

FOUNDATION™

fieldbus

Fieldbus indicator

Single variable

General purpose

- ◆ Large easy to read 5 digit display.
- ◆ 31 segment bargraph
- ◆ FOUNDATION™ fieldbus protocol, ITK 6.3 compliant.
- ◆ Compatible with most system hosts.
- ◆ Bus powered, only 13mA consumption.
- ◆ IP66 field mounting GRP enclosure.
- ◆ 3 year guarantee

www.beka.co.uk/ba614df-f

BEKA

associates

BEKA associates Ltd. Old Charlton Rd.
Hitchin, Hertfordshire, SG5 2DA, U.K.
Tel. (01462) 438301 Fax (01462) 453971
e-mail sales@beka.co.uk www.beka.co.uk

SPECIFICATION

Display

Type	Liquid crystal
	5 digits plus sign, 20mm high (-99999 to 99999)
	31 segment bargraph
Variables	Single

Fieldbus communication

Voltage	9 to 32V
Current	13mA
Compliant with	IEC61158-2 31.25kbits/s Voltage Mode Clauses 11 and 22
Protocol	FOUNDATION™ fieldbus, ITK 6.3 compliant
Function block	1 x IS (input selector)

Environmental

Operating temp	-20 to 70°C
Storage temp	-40 to 85°C
Humidity	To 95% @ 40°C
Enclosure	IP66
EMC	In accordance with EU Directive 2014/30/EU


Mechanical

Terminals	Screw clamp for 0.5 to 1.5mm ² cable.
Weight	1.6kg


Accessories

Scale legend	Units of measurement marked onto display escutcheon.
Tag legend	Tag number or applicational information marked onto display escutcheon.
Stainless legend plate	Stainless steel plate etched with tagging or applicational information secured to the front of the instrument.
Pipe mounting kit	BA392D or BA393
Interface guide	May be downloaded from www.beka.co.uk

DIMENSIONS (mm)

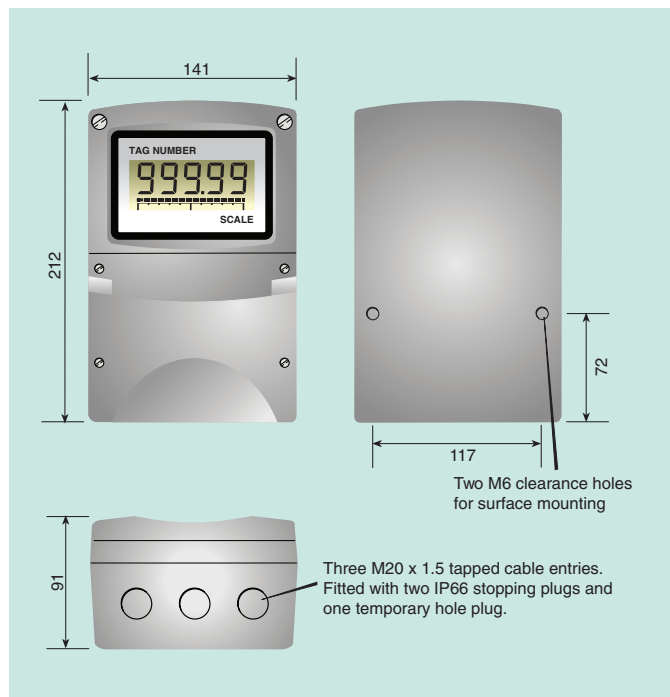

TERMINAL CONNECTIONS

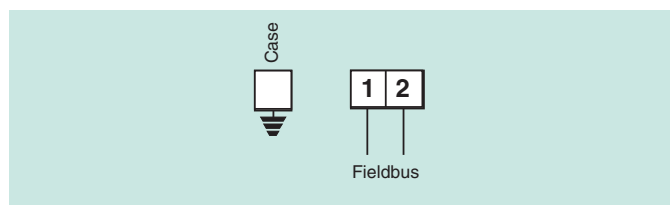

HOW TO ORDER

Model number	Please specify BA614DF-F
Accessories	Please specify if required
Escutcheon markings	
Scale	Scale legend
Tag	Tag legend
Stainless legend plate	Legend
Pipe mounting kit	BA392D or BA393