

The **BA318E** is a third generation intrinsically safe tachometer that is compatible with the earlier BA368C, but has a much larger display and an isolated synchronous pulse output. The tachometer is easy to use and can be configured on-site to operate with a magnetic pick-off, switch contact, proximity detector, open collector or a voltage pulse sensor. A slide-in scale card simplifies identification and international intrinsic safety certification permits worldwide installation.

Main application of the BA318E is to measure and display rotational speed within a hazardous area. To assist with routine maintenance the tachometer includes a run-time clock that records the number of hours that the monitored machinery has been operating.

The large display has high contrast and a very wide viewing angle, enabling the tachometer to be read in most lighting conditions over a wide temperature range. An optional backlight is available. Speed may be displayed in almost any units of measurement per second, minute or hour. Run-time is shown on the lower display in hours with a tenth of an hour resolution. If not required the run-time display may be disabled.

Open collector pulse output synchronously retransmits the tachometer input pulse to other instruments. The output pulse frequency may be divided and the pulse width may be defined.

IP66 front panel protection with a neoprene gasket to seal the joint between the tachometer and the instrument panel allows the BA318E to be installed in areas that will be washed down. To simplify installation and maintenance, the tachometer has removable terminal blocks enabling panel wiring to be completed before the instrument is installed.

International intrinsic safety certification permits the BA318E tachometer to be installed worldwide. When configured to operate with a sensor having a voltage or magnetic pick-off output, the input terminals comply with the requirements for *simple apparatus* reducing system design and documentation. All input safety parameters are the same or greater than those for the preceding BA368C, thus allowing the BA318E to safely replace the earlier model.

Display backlighting, which is internally powered from the tachometer, is available as a factory fitted option. It provides green background illumination enhancing daylight viewing and allowing the display to be easily read at night or when the tachometer is installed in a poorly illuminated area.

An optional isolated 4/20mA output may be configured to produce an analogue output proportional to any part of the speed display. The output is galvanically isolated and has been certified as a separate intrinsically safe circuit complying with the requirements for *simple apparatus* thus simplifying connection to other instruments.

Optional dual alarms which can switch hazardous area loads such as a sounder or solenoid valve, or safe area loads via a Zener barrier or isolator, are available as a factory fitted option. The two galvanically isolated, solid state voltage free outputs may be independently conditioned as speed or run-time alarms with normally open or closed outputs. Annunciators on the BA318E display show the status of both alarm outputs.

When panel space is limited the BA317E provides similar features in a smaller 94 x 48mm enclosure.

BA318E

One input tachometer

Intrinsically safe for use in all gas hazardous areas

- ◆ **Configurable input:** magnetic pick-off, switch contact, proximity detector, open collector or voltage pulse.
- ◆ **Separate speed and run-time displays.**
- ◆ **Intrinsically safe**
- ◆ **144 x 72mm DIN enclosure with IP66 front protection.**
- ◆ **Isolated pulse output**
- ◆ **Optional:**
Backlight
Dual alarms
4/20mA output
- ◆ **3 year guarantee**

www.beka.co.uk/ba318e




BEKA associates

BEKA associates Ltd. Old Charlton Rd. Hitchin, Hertfordshire, SG5 2DA, U.K.
Tel. (01462) 438301 Fax (01462) 453971
e-mail sales@beka.co.uk www.beka.co.uk


SPECIFICATION

Power supply		
Voltage	10 to 28V from a Zener barrier or galvanic isolator	
Current	16mA max plus 16mA for optional backlight	
Input		
	Lower	Upper switching thresholds
Switch contact	100Ω	1kΩ
Proximity detector (NAMUR)	1.2mA	2.1mA
Open collector	2kΩ	10kΩ
Magnetic pick-off	0	+40mV
Voltage pulse (low)	1V	3V 28V max
Voltage pulse (high)	3V	10V 28V max
Frequency		
Switch contact	150Hz typical] Depends upon pulse width and debounce setting.
Other inputs	100kHz max	
All inputs	0.01Hz min	
Display		
Type	Liquid crystal	
Zero blanking	Blanked apart from 0 in front of decimal point	
Speed	8 digits 18mm high	
Decimal point	1 of 7 positions or absent	
Run-time	6 digits 12mm high, 99999.9 hours	
Grand total run-time	5 x 10 ⁶ hours	
Remote reset		
	Contact closure with resistance less than 10kΩ	
Pulse output		
Frequency	Isolated open collector 5kHz max, synchronous with input pulse or divisible.	
Divisible by	1, 10, 100, 1000 or 10000	
Pulse width	0.1, 0.5, 1, 2.5, 5, 10, 25, 50, 100, 250 or 500ms	
Ron	51Ω + 3V max	
Roff	1MΩ min	
I max	10mA	
Configurable functions		
Rate scale factor	Adjustable between 0.0001 and 99999 pulses / revolution	
Speed timebase	Speed may be displayed per second, minute or hour.	
Intrinsic safety		
Europe ATEX		
Code	Group II Category 1G Ex ia IIC T5 Ga	
Cert. No.	-40°C ≤ Ta ≤ 70°C ITS16ATEX28408X	
International IECEx		
Code	Ex ia IIC T5 Ga	
Cert. No.	-40°C ≤ Ta ≤ 70°C IECEx ITS 16.0004X	
ETL & cETL		
Code	Class I Div 1 Gp A, B, C, D T5 (USA & Canada) Class II Div 1 Gp E, F, G. Class III Div 1(USA & Canada) Class I Zone 0 AEx ia IIC T5 Ga (USA) Ex ia IIC T5 Ga (Canada) -40°C ≤ Ta ≤ 70°C	
Nonincendive USA & Canada		
Code	ETL & cETL Class I Div 2 Gp A, B, C, D T5 Class II Div 2 Gp F, G. Class III Div 2 -40°C ≤ Ta ≤ 70°C	
ETL Control No.	4008610	
Environmental		
Operating temp	-40 to +70°C display -20 to +70°C	
Storage temp	-40 to +85°C	
Humidity	to 95% at 40°C non condensing	
Vibration	Report available	
Enclosure	Noryl SE1GFN3. Front IP66, rear IP20	
EMC	Complies with EMC Directive 2014/30/EU	
Mechanical		
Terminals	Screw clamp for 0.5 to 1.5mm ² cable, removable terminal blocks.	
Weight	0.35kg	
Accessories		
Backlight	Green LED internally powered	
4/20mA output	Isolated current sink, certified as a separate intrinsically safe circuit complying with requirements for <i>simple apparatus</i> .	
Voltage drop	5 to 28V	
Alarms	Two alarms each of which may be independently configured as a speed or run-time, high or low alarm with a NO or NC output.	
Outputs	Isolated, single pole, voltage free solid state switch certified as a separate intrinsically safe circuit complying with requirements for <i>simple apparatus</i> .	
Ron	5Ω + 0.7V max	
Roff	1MΩ min	

DIMENSIONS (mm)

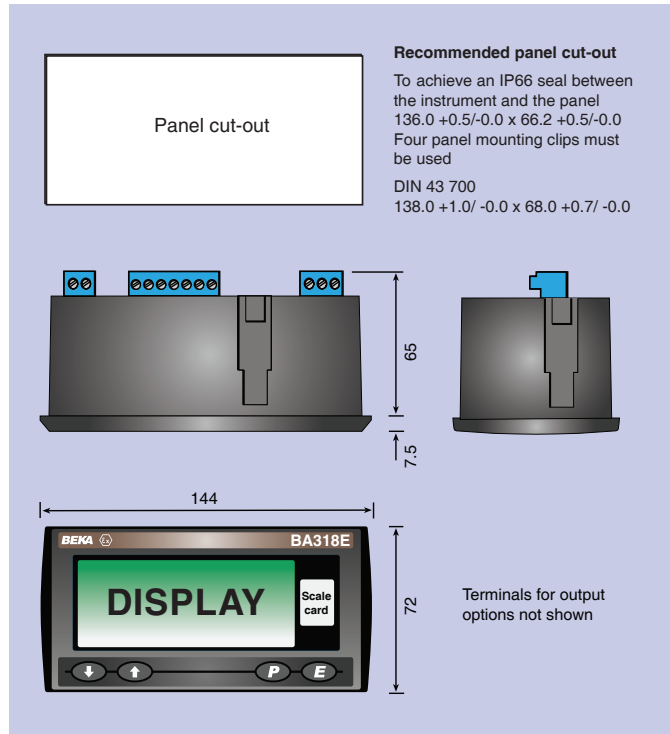

TERMINAL CONNECTIONS

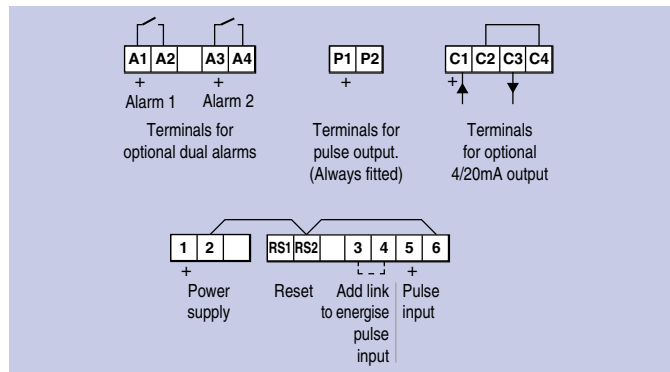

Scale card

Blank card fitted to all instruments. Can be supplied typeset with specified units of measurement for no additional charge at time of purchase. ~

Tag legend

Specified tag number or application printed onto rear of instrument. ~

~ See accessory datasheet for details

HOW TO ORDER

Model number	Please specify BA318E
Input	Type *
Speed scale factor	XXXXX *
Speed timebase	Seconds, minutes or hours*
Pulse output	Direct retransmission or scaled*
If scaled:	
Dividing factor	1, 10, 100, 1000 or 10000
Pulse width	0.1, 0.5, 1, 2.5, 5, 10, 25, 50, 100, 250 or 500ms
Accessories	Please specify if required
Display backlight	Backlight
4/20mA output	4/20mA output
Dual alarms	Alarms
Scale card	Legend required
Tag	No charge if ordered with tachometer. Legend required

* Tachometer can be supplied configured as required for no additional charge. If configuration information is not supplied, instrument will be configured for open collector input with speed scaling factor of 1.0 and a timebase of minutes. Can easily be reconfigured on-site.