

The **BA364E** is a two input, field mounting, intrinsically safe counter which can display the sum or difference of the two pulse inputs, or the count direction of Input A may be controlled by input b. The output from a quadrature encoder can also be decoded to show speed and direction of movement. The counter is easy to use and each input can be independently configured on-site to operate with a magnetic pick-off, switch contact, proximity detector, open collector or a sensor with a voltage pulse output. International intrinsic safety certification permits worldwide installation.

**Any display application** requiring the sum or difference of pulse outputs from two sensors can be performed by the BA364E, such as counting the number of strokes performed by two reciprocating pumps and displaying total volume and rate of pumping in engineering units. The counter's quadrature decoder also enables the position of a shaft or a cable to be displayed together with its speed and direction of movement.

**International intrinsic safety certification** allows the BA364E counter to be installed in gas hazardous areas worldwide. When configured to operate with a sensor having a voltage or magnetic pick-off output, the input terminals comply with the requirements for *simple apparatus* reducing system design and documentation.

**The large display** has high contrast and a wide viewing angle. Green backlighting enhances daylight viewing enabling the counter to be read at night or when installed in a poorly illuminated area. The total display may be shown in almost any engineering units and may be reset using the front panel push buttons or an external contact closure. Rate may be displayed in the same or different units of measurement per second, minute or hour.

**IP66 protection** is provided by the robust GRP enclosure which has stainless steel fittings, silicone gaskets and a 4mm thick armoured glass window. Ingress and impact protection have been independently assessed by Intertek. A separate terminal compartment allows connection of field wiring without exposing the instrument's electronics.

**Isolated pulse and 4/20mA outputs** which comply with the requirements for *simple apparatus* are included. The pulse output can synchronously retransmit either of the pulse inputs, or a scaled pulse when the least significant digit of the total display is incremented. The 4/20mA output may be configured to produce an output proportional to any part of the rate or total display.

**An optional isolated 4/20mA current sink** output, which has been certified as a separate intrinsically safe circuit complying with the requirements for *simple apparatus*, may be configured to produce an output proportional to any part of the rate or total display.

**Dual alarms** with galvanically isolated solid state outputs can switch hazardous area loads such as a sounder or solenoid valve, or safe area loads via a Zener barrier or isolator. Both may be independently configured as a rate or a total alarm monitoring either input, or the sum or difference of the two inputs. Annunciators on the BA364E display show the status of both alarm outputs.

**The escutcheon** which shows the counters units of measurement and tag information can be changed on-site. New instruments are fitted with a printed escutcheon showing customer specified marking. If this information is not supplied a blank escutcheon is fitted which can easily be marked on-site. An optional laser engraved stainless steel legend plate secured to the front of the instrument is also available.

**The compact BA364G** has the same functions as the BA364E without a separate terminal compartment.

# BA364E

## two input counter

*Intrinsically safe for use in all gas hazardous areas*

- ◆ **Configurable input:** magnetic pick-off, switch contact, proximity detector, open collector, voltage pulse or quadrature decoder.
- ◆ **Separate displays with backlight**
- ◆ **Intrinsically safe**
- ◆ **IP66 GRP enclosure with separate terminal compartment**
- ◆ **Isolated dual alarms, pulse and 4/20mA outputs.**
- ◆ **3 year guarantee**

[www.beka.co.uk/ba364e](http://www.beka.co.uk/ba364e)



# BEKA


## associates

BEKA associates Ltd. Old Charlton Rd. Hitchin, Hertfordshire, SG5 2DA, U.K.  
Tel. (01462) 438301 Fax (01462) 453971  
e-mail [sales@beka.co.uk](mailto:sales@beka.co.uk) [www.beka.co.uk](http://www.beka.co.uk)


## SPECIFICATION

<b>Power supply</b>	
Voltage	10 to 28V from a Zener barrier or galvanic isolator
Current	32mA
<b>Input</b>	
Switch contact	<b>Lower</b> 100Ω <b>Upper</b> 1kΩ
Proximity detector (NAMUR)	1.2mA      2.1mA
Open collector	2kΩ      10kΩ
Magnetic pick-off	0      +40mV
Voltage pulse (low)	1V      3V      28V max
Voltage pulse (high)	3V      10V      28V max
Frequency	
Switch contact	150Hz typical
Other inputs	100kHz max
All inputs	0.01Hz min
} <i>Depends upon pulse width and debounce setting.</i>	
<b>Display</b>	
Type	Liquid crystal
Backlight	Green LED internally powered
Zero blanking	Blanked apart from 0 in front of decimal point
Total #	
Digits	8 digits 18mm high
Decimal point	1 of 5 positions or absent
Rate #	
Digits	6 digits 12mm high
Decimal point	1 of 4 positions or absent
} <i>Rate &amp; Total can be shown on either 6 or 8 digit display</i>	
Grand total	Maximum count 10 <sup>16</sup>
<b>Remote reset</b>	Contact closure with resistance less than 10kΩ
<b>Configurable functions</b>	
Input function	Each input individually configurable
	Input A + b: Input A – b: Input A direction
	controlled by input b or quadrature encoder input
	(Inputs 90° out of phase).
Total scale factor	
Adjustable between 0.0001 and 99999	
Rate scale factor	
Adjustable between 0.0001 and 99999	
Rate timebase	
Rate may be displayed per second, minute or hour	
Rate display filter	
Adjustable digital filter	
<b>Pulse output</b>	
	Isolated open collector, certified as a separate
	intrinsically safe circuit complying with the
	requirements for <i>simple apparatus</i> .
Source and output	
	Either input can be synchronously retransmitted,
	5kHz max.
	or
	Least significant digit of total display pulse output
	divisible by 1, 10, 100, 1000 or 10000
	Pulse width definable as 0.1, 0.5, 1, 2.5, 5, 10, 25,
	50, 100, 250 or 500ms.
Ron	51Ω + 3V max
Roff	1MΩ min
I max	10mA
<b>4/20mA output</b>	
	Isolated current sink. Configurable to represent any
	part of the rate or total display.
Voltage drop	5 to 28V
<b>Dual alarms</b>	
	Two alarms each of which may be independently
	configured as a rate or total, high or low alarm with
	a NO or NC output.
Outputs	
Ron	Isolated single pole, voltage free solid state switch
Roff	5Ω + 0.7V max
	1MΩ min
<b>Intrinsic safety</b>	
<b>Europe ATEX</b>	
Code	Group II Category 1G Ex ia IIC T5 Ga
	-40 ≤ Ta ≤ 70°C
Cert. No.	ITS16ATEX28408X
<b>International IECEx</b>	
Code	Ex ia IIC T5 Ga
	-40 ≤ Ta ≤ 70°C
Cert. No.	IECEx ITS 16.0004X
<b>ETL &amp; cETL</b>	
Code	Class I Div 1 Gp A, B, C, D T5
	Class II Div 1 Gp E, F, G Class III
	Class I Zone 0 AEx ia IIC T5 Ga
	Zone 20 AEx ia IIC T80°C Da
	Ex ia IIC T5 Ga
	-40°C ≤ Ta ≤ 70°C
	} USA & Canada
	} USA
	} Canada
<b>Nonincendive</b> USA & Canada ETL & cETL	
Code	Class I Div 2 Gp A, B, C & D T5
	Class II Div 2 Gp F, G.
	Class III Div 2
	Ex ia IIC T5 Ga
	-40 ≤ Ta ≤ 70°C
ETL Control No.	4008610
<b>Environmental</b>	
Operating temp	-40 to +70°C display -20 to +70°C
Storage temp	-40 to +85°C
Humidity	to 95% at 40°C non condensing
Vibration	Report available
Enclosure	
Material	GRP
Ingress	IP66
EMC	Complies with 2014/30/EU

## DIMENSIONS (mm)

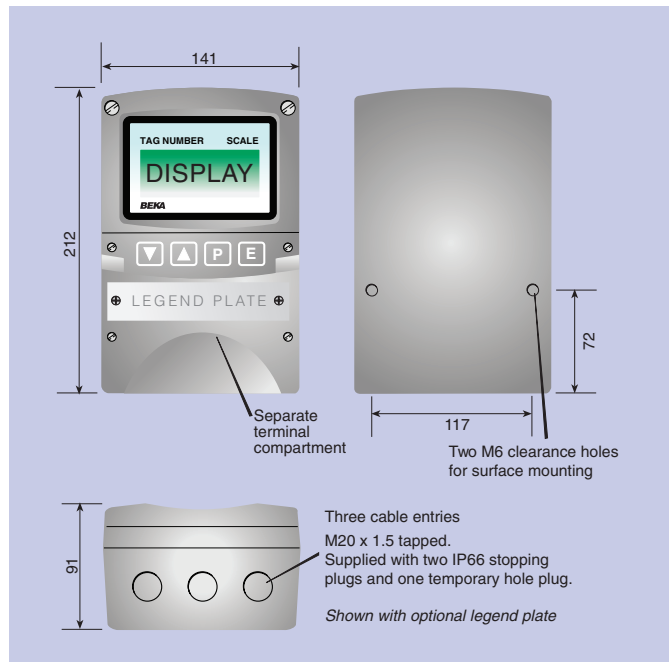

## TERMINAL CONNECTIONS

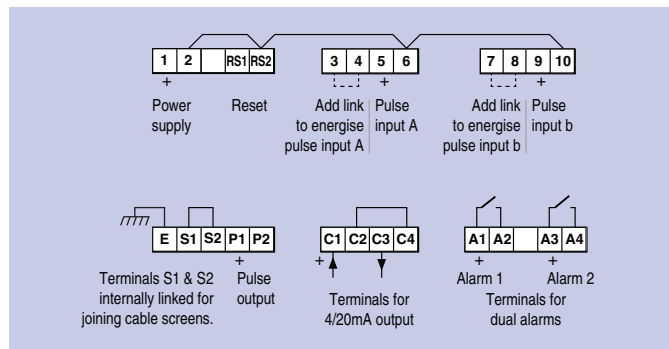

<b>Mechanical</b>	
Terminals	Screw clamp for 0.5 to 1.5mm <sup>2</sup>
Weight	1.7kg
<b>Accessories</b>	
Escutcheon	Blank card fitted to all instruments. Can be supplied printed with specified units of measurement and tag information for no additional charge at time of purchase. #
Legend plate	316 stainless steel plate secured to the front of the instrument, laser engraved with tag number or application information. #
Pipe mounting kit	BA392D or BA393 #
# See accessory datasheet for details	

## HOW TO ORDER

Model number	<b>Please specify for each input</b>
Input function	BA364E
Input	Input A + b: Input A – b: Input A direction controlled by input b or quadrature encoder input *
Total scale factor	Type *
Rate scale factor	XXXXX *
Rate timebase	XXXXX *
	Seconds, minutes or hours*
<b>Accessories</b>	<b>Please specify if required</b>
Escutcheon marking	Legend required
Units	Legend required
Tag	No charge if ordered with counter
Stainless legend plate	Legend required
Pipe mounting kit	BA392D or BA393

\* Counter can be supplied configured as required for no additional charge. If configuration information is not supplied, instrument will be configured for Input A + b, open collector inputs with rate and total scaling factors of 1.0 and a timebase of seconds with direct pulse retransmission. Can easily be reconfigured on-site.